


P220/P230 FIT METAL PUMP


25 mm (1") Pump
Maximum Flow Rate:
212 lpm (56 gpm)

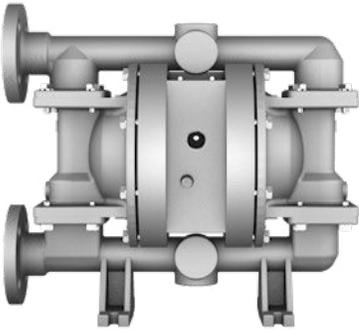

P230 METAL

DIMENSIONAL DRAWINGS

P220 Metal – Center-Ported

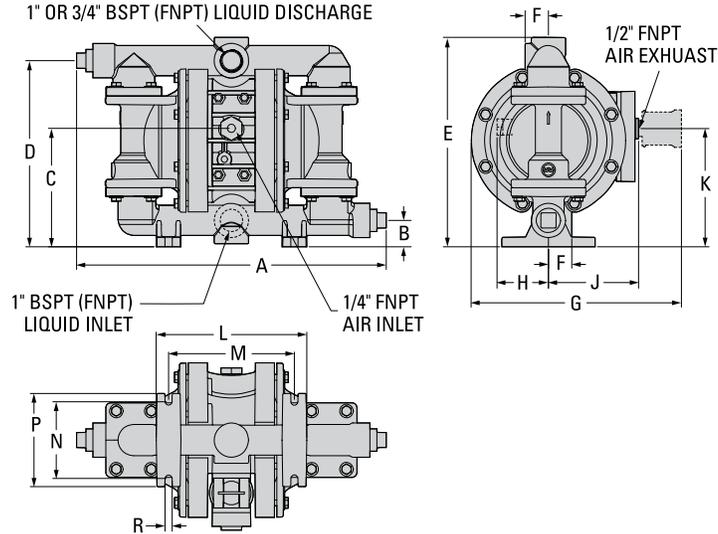

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	422	16.6
B	36	1.4
C	160	6.3
D	254	10.0
E	287	11.3
F	33	1.3
G	287	11.3
H	71	2.8
J	122	4.8
K	163	6.4
L	206	8.1
M	173	6.8
N	104	4.1
P	127	5.0
R	10	0.4


LW0444 REV. A

PUMP DATA

Specifications:

- Ship Weight..... Aluminum 11 kg (24 lb)
- Ductile Iron 21 kg (47 lb)
- 316 Stainless Steel 23 kg (51 lb)
- Air Inlet6 mm (1/4")
- Liquid Inlet.....25 mm (1")
- Liquid Outlet.....25 mm (1")

P230 Stainless Steel

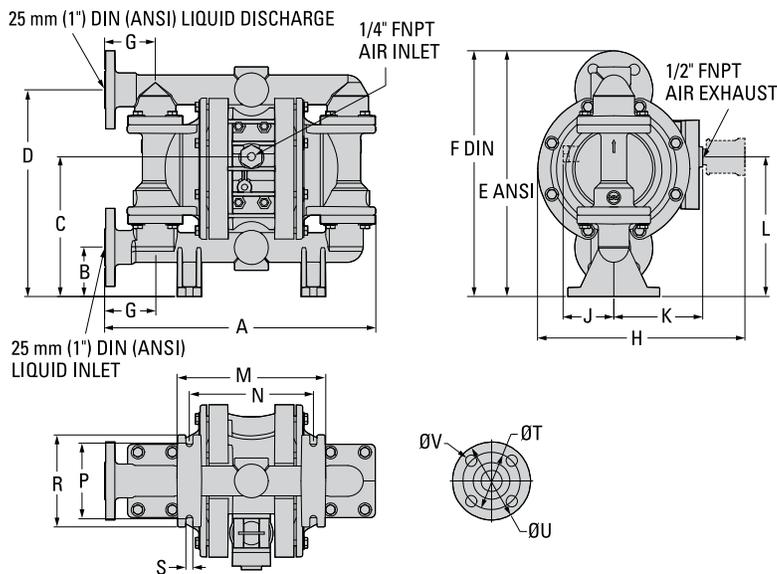

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	373	14.7
B	69	2.7
C	195	7.6
D	287	11.4
E	340	13.4
F	343	13.5
G	71	2.8
H	287	11.3
J	71	2.8
K	122	4.8
L	193	7.6
M	206	8.1
N	173	6.8
P	104	4.1
R	127	5.0
S	10	0.4

DIN FLANGE

T	85 DIA.	3.3 DIA.
U	115 DIA.	4.5 DIA.
V	14 DIA.	0.6 DIA.

ANSI FLANGE

T	79 DIA.	3.1 DIA.
U	109 DIA.	4.3 DIA.
V	14 DIA.	0.6 DIA.


LW0445 REV. A

P220/P230 FIT METAL PUMP

PERFORMANCE

P220/P230 METAL RUBBER-FITTED

Max. Flow Rate.....212 lpm (56 gpm)
 Max. Inlet Pressure8.6 bar (125 psig)
 Max. Solids Passage..... 6.4 mm (1/4")
 Max. Suction Lift.....5.4 m Dry (17.6')
 9.3 m Wet (30.6')

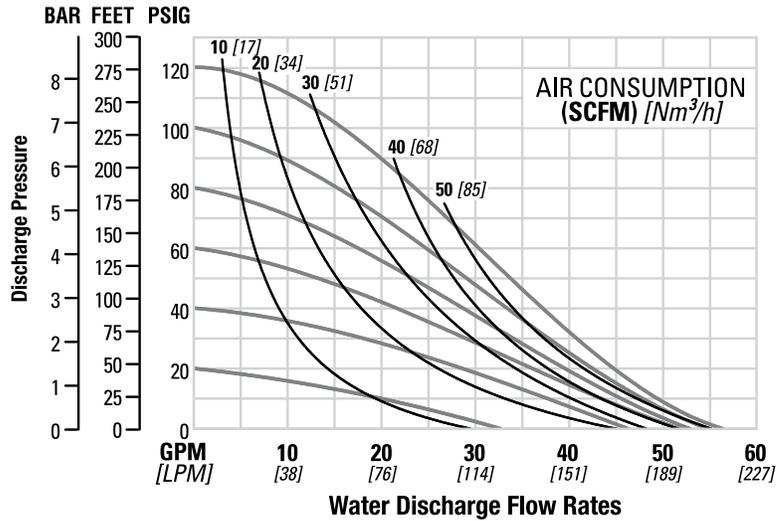

P220/P230 METAL REDUCED-STROKE PTFE-FITTED

Max. Flow Rate.....168 lpm (44 gpm)
 Max. Inlet Pressure8.6 bar (125 psig)
 Max. Solids Passage..... 6.4 mm (1/4")
 Max. Suction Lift.....3.5 m Dry (11.4')
 9.3 m Wet (30.6')

